

## SVC Series AC. Automatic Voltage Regulator

### MAIN FEATURES

- 1、 Automatic voltage regulation
- 2、 Protection against brownout & over voltage
- 3、 Wide input voltage range
- 4、 Short circuit & over load protection
- 5、 Selectable delay Time




SVC-500VA  
SVC-1000VA  
SVC-1500VA

### DISPLAYS FOR SELECTION



SVC-500VA  
SVC-1000VA  
SVC-1500VA

SVC-2000VA  
SVC-3000VA

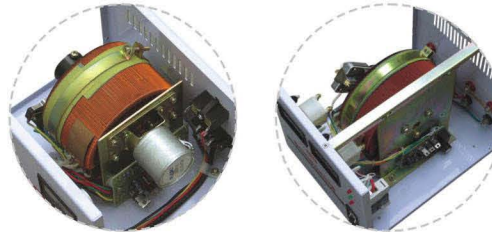

SVC-2000VA  
SVC-3000VA  
SVC-5000VA

### TECHNICAL PARAMETER:

Specification		SVC-500VA	SVC-1000VA	SVC-1500VA	SVC-2000VA	SVC-3000VA	SVC-5000VA
Input	Phase	Single phase					
	Voltage	AC150V-250V/50V-130V					
	Frequency	50Hz/60Hz					
Output	Voltage	220V±3%/, 110V±6%					
	Capacity	400W	800W	1200W	1600W	2400W	4000W
	Frequency	50Hz/60Hz					
Protection	Low Volt.	AC186V±4V					
	Over Volt.	AC246V±4V					
	Delay	3-7sec/3-7min Selectable					
	Over load /short Circuit	Yes					
Packaging	pcs per Carton	4			2		1
	Shipping Wt.(KG)	18	25.8	29.6	24.5	26.8	74.5
	Package Dimensions (mm)	430×240×360	550×505×210		590×335×235	600×360×270	540×305×256
Efficiency	AC-AC	>95%					
Acoustic	Noise level	≤50dB					
Environmental	Temperature	-5°C~45°C Degree					
	Humidity	20% to 90%					
QTY(pc)	20FT	3000	1840	1840	1200	960	660

## SVC Series AC. Automatic Voltage Regulator

### MAIN FEATURES

1. Automatic voltage regulation
2. Protection against brownout & over voltage
3. Wide input voltage range
4. Short circuit & over load protection
5. Selectable delay time




SVC-5000VA  
SVC-7500VA  
SVC-10KVA

### DISPLAYS FOR SELECTION



SVC-5000VA  
SVC-7500VA  
SVC-10KVA



SVC-10KVA



SVC-10KVA(vertical type)

### TECHNICAL PARAMETER:

Specification		SVC-7500VA	SVC-10KVA	SVC-10KVA	SVC-15KVA	SVC-20KVA	SVC-30KVA
Input	Phase	Single phase 176-260V					
	Voltage	AC160V-250V					
	Frequency	50Hz/60Hz					
Output	Voltage	AC220V±3%					
	Capacity	6000W	8KW	8KW	12KW	16KW	24KW
	Frequency	50Hz/60Hz					
	Power factor	0.8					
Protection	Over voltage protection	AC246V±4V					
	Low voltage protection	AC184V±4V					
	Over load /short Circuit	Yes					
	pcs per Carton	1					
Packaging	Shipping Wt.(kg)	30.5	34	46.5	61.2	63	96
	Dimensions (mm)	505×365×300		425×410×675	480×400×850	480×400×850	960×530×460
Efficiency	AC-AC	>95%					
Acoustic	Noise level	≤50dB					
Environmental	Temperature	-5°C~45°C Degree					
	Humidity	20% to 90%					
QTY(pc)	20FT	465	465	235	170	170	115